



SUL181h/SYN161h Analogue daily time switch

The SUL181h/SYN161h daily program analog time switches are programmed using switching segments, it's quickly read and easy to change. The shortest switching time is 30 minutes and it can switching with continuous ON/AUTO/continuous OFF.

Application

SUL181h/SYN161h fits for the particular use of the following tasks: Billboard or Showcase lighting, Air-condition or Commercial Refrigeration, Pumps/ Motor/ Geyser/Fan Control, Hydroponic Systems, Wastewater Treatment Systems, Generator Exercising, Boilers / Heater Control, Pool & Spa, etc.

Description

● 1 channel	● Switching preselection
● Daily program	● Quartz controlled
● Fine adjustment for time setting accurate to the minute	● Manual switching with continuous ON/AUTO/OFF
● Shortest switching time: 30 minutes	● Switching status display
● Simple summer/winter time correction	● Permanent ON/OFF switch
SUL181h: With power reserve (NiMH rechargeable battery) / SYN161h: Without power reserve	


Technical date

Supply voltage	230Vac, 50/60Hz other voltages on request
Switching capacity	resistive load: 16 A / 250 V \sim at $\cos\phi=1$
	inductive load: 4 A / 250 V \sim at $\cos\phi=0.6$
Number of switching segments	48
Time accuracy at 25 °C	$\leq \pm 2$ Sek./day (quartz)
Power reserve	SUL181h: 7 days
Type of contact	changeover contact
Type of protection	IP 20
Class of protection	II according to EN 60 730-1
Permitted ambient temperature	-10 \sim +50 °C (non-icing)
Test approval	CE
Power consumption	1.5 VA

Maximum recommended load (10,000 operations)

Filament / Halogen lamp 230V	LED lamp 230V < 2 W	LED lamp 230V > 2 W
1100 W	20 W	180 W

Wiring diagram

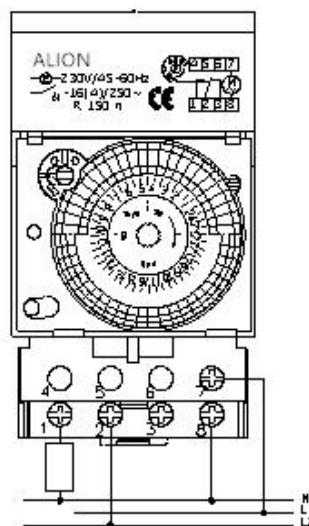

Dimensions

