

DATASHEET CEF40-WE

Ductable Ceiling Exhaust Fan, Centrifugal

Our CEF range offers stylish solutions for when design is imperative. With small and large models to suit your needs, this range of exhaust fans offers a minimalist aesthetic that will blend into your home. These fans can either be ducted or left open, depending on the building requirements of your local area, and come with a plug and lead.



Features


- Suitable for ducting (150mm).
- Round body for easy installation.
- Slimline profile for modern interiors.
- Fitted with Plug and Lead.

Applications

- Residential: Bathrooms, toilets, laundries.
- Commercial: Bathrooms, toilets.

Specifications

o po o modulo no	
Airflow	290m³/h (265m³/h ducted)
Decibel rating at 3m	44dBA
Plug & lead length	850mm
IP Rating	IPX4
Ceiling cut-out	287mm Ø
Duct diameter (ducting not included)	150mm Ø
Rated voltage	240V, 50Hz
Watts	35W
Full Load Current	0.15A
Warranty	3-year in-house

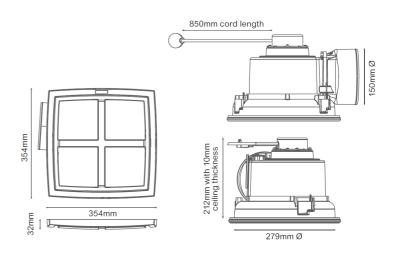

Schneider Electric (Australia) Pty Ltd Contact us: Clipsal.com/feedback

National Customer Care Enquiries: Tel 1300 2025 25 Fax 1300 2025 56 New Zealand National Customer Care Enquiries: Tel 0800 652 999 Fax 0800 101 152 Schneider Electric (Australia) Pty Ltd reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

