

LED Toughnut Batten

TPTUFF Series

TECHNICAL BROCHURE

Built tough for high impact

A versatile and robust weatherproof and vandal resistant LED luminaire specifically designed for a wide range of commercial and industrial exterior illumination. The tough impact resistant body enables protection in high abuse areas



Application




Designed for exterior commercial applications where illuminating areas for security purposes is critical. Factories, Warehouses, Schools, Shopping Centre's and Public Buildings are prime areas for this product.

Colour Temperature Selection

This batten has a Tri-Temp colour selector switch allowing the choice of 3 different light temperature outputs of 3000K, 4000K or 6500K

Range

Cat. No.	Description
TPTUFF1	LED Toughnut Batten, IP54, Colour Changing



Schneider Electric (Australia) Pty Ltd
78 Waterloo Road, Macquarie Park, NSW, 2113
National Customer Care: 1300 2025 25
Fax: 1300 369 288
www.clipsal.com

Life Is On

CLIPSAL
by Schneider Electric

LED Toughnut Batten

TPTUFF Series


TECHNICAL BROCHURE

Specifications

Catalogue Number	TPTUFF1
Voltage rating	220 - 240 Vac, 50 Hz
LED Power	10 W
Total System Power	12 W
Lumens	≥ 1,000 lm
Colour Temperature	Selectable 3000K / 4000K / 6500K
CRI	> 80
IP Rating	IP54
IK Rating	IK08
Lifespan (L70)	30,000 hrs
Operating Temperature	-10°C to +45°C
Operating Humidity	+10% to +95% non-condensing
Inrush Current	3.16 A
Duration	84.8 uS

Colour Temperature Selector


Select the desired position prior to installation. The switch can be located on the top side of the gear-tray



3000K	4000K	6500K
Warm White	Cool White	Day Light

Construction

Catalogue Number	TPTUFF1
Length (L)	675 mm
Width (W)	96 mm
Height (H)	115 mm
Weight	~1.6 kg
Material	Polycarbonate Base and Diffuser

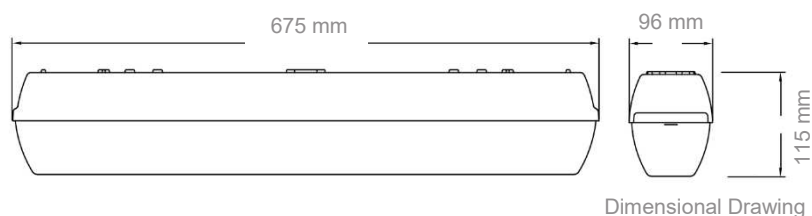

Class II



Life Is On

CLIPSAL
by Schneider Electric