


## Product data sheet

### Characteristics

# P223H-3A

## Pro Series, Protective box IK10 with lockable lid

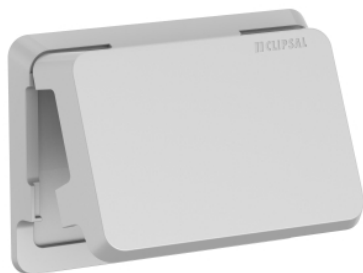

### Main

Range	Pro Series
Product brand	Clipsal
Product or component type	Box
Device application	Protection
Colour	Wall: aluminium
Cover type	Lockable hinged lid
Lock type	1 point locking system
Enclosure type	Enclosure for power outlet

### Complementary

Shape	Rectangular
Device mounting	Wall mounted
Mounting mode	Surface mounted
Mounting support	Wall box
Material	Zinc alloy
Installation direction	Horizontal
Fixing mode	By screws
Number of mounting holes	6
Tightening torque	0.53 N.m
Length	150 mm
Depth	45 mm
Height	112 mm
IK degree of protection	IK10
Targeted country	Australia

### Environment

Ambient air temperature for operation	0...45 °C
---------------------------------------	-----------

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.7 cm
Package 1 Width	10.5 cm
Package 1 Length	13.0 cm
Package 1 Weight	672.0 g

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.