


Product data sheet

Characteristics

P3025XAG

Pro Series, switched socket, 3 switch & 2 socket, horiz, 10 A

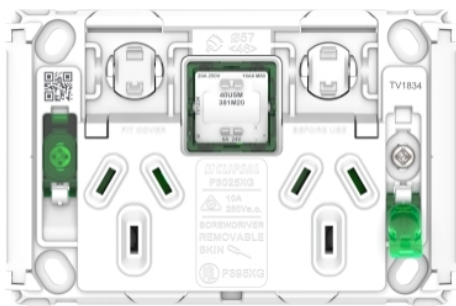

Main

| | |
|----------------------------|-----------------------------|
| Range | Pro Series |
| Product or component type | Switched socket |
| Device presentation | Mechanism with fixing frame |
| Outlet poles configuration | 2P + E with shutter |

Complementary

| | |
|--------------------------------|------------------------|
| Device mounting | Flush |
| Number of power socket outlets | 2 |
| Number of rocker | 3 |
| Outlet standard | Australian |
| Outlet standard description | With earthing contact |
| Outlet standard | Australian/New Zealand |
| Ground lug position | Straight 180° position |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.