



MERCURY BASIC



FEATURES

- Long life LEDs
- Low power consumption
- 300 x 150 mm decal size
- Lithium battery (LiFePO₄)
- Single and double sided decals
- Compliant emergency exit sign



ENVIRONMENT

The battery used is safe for the environment



COMPATIBLE

Compatible with Mercury cases and mounting kits




CHAIN OR ROD MOUNT

Suspend the Mercury Basic using a chain or rod



WALL / SURFACE MOUNT

Can easily be mounted on the wall or ceiling

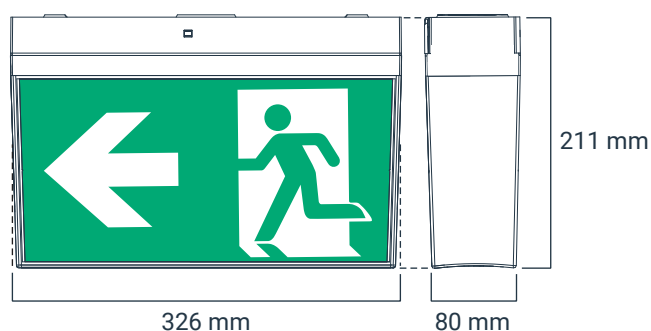

PRODUCT RANGE

ORDER CODE	QTY
EV-MERCURY-BASIC Basic Emergency Exit	4

FEATURES

- Long life LEDs
- Low power consumption
- 300 x 150 mm decal size
- Lithium battery (LiFePO₄)
- Single and double sided decals
- Compliant emergency exit sign

TOTAL POWER CONSUMPTION (TPC)

MAINTAINED MODE		NON-MAINTAINED MODE	
MAX.	AVG.	MAX.	AVG.
3.5 W	2.2 W	1.4 W	0.32 W

ACCESSORY RANGE

ORDER CODE	DESCRIPTION
EV-MERCURY-BASIC-DP	Mercury Decal Pack
EV-MERCURY-CASE	Mercury IP65 Case
EV-RODMOUNT-WHT	Rod mount, incl. Bracket for roof /body
ZC-BATT-1500MAH-1	1500mAh 3.2V 1 Cell LiFePO ₄ Battery

OPERATIONAL INFORMATION

GENERAL

Voltage	~230V
Frequency	50Hz
Ambient temp.	0 - 40°C
Class	2
Wiring	Terminal block (1-16 mm □)
Mounting type	Surface / suspended (Rod Mount Kit available)
IP rating	IP20 (IP65 weatherproof case available)
Decal size	300 x 150 mm
Lamp power	1 W

EMERGENCY

Rated duration	3 hours
----------------	---------

COMPLIANCE

Standards	IEC 60598-2-22 CISPR 15 EMC-2004/108/EC LVD-2006/95/EC
-----------	---

BATTERY		CHARGE	
Type	LiFePO ₄	Type	Variable
Voltage	3.2V	Time	16 Hours
Code	zc-batt-1500mah-1		

CONSTRUCTION

Body	PC
Diffuser	PC

NOTE: For more information on the chemical resistance of our polycarbonate, please see our website.

Datasheet is subject to change without notice, E&OE
Last updated: 27 September 2018 _V2.1