



WIRE CONNECTORS

WIRE CONNECTOR SOLUTIONS



idealind.com



GEN II LEVER WIRE CONNECTORS

The IDEAL Lever connectors utilise the latest connection technologies and can accommodate multiple wires of different types of sizes.

It offers a fast, simple and cost-effective alternative to terminal strips allowing electrical professionals to save time and money on site while achieving easier, more consistent terminations for wires up to 4mm² (12AWG) and 32 Amps.

- For use in all applications up to 32A including lighting, access control, radial and final ring circuits
- Releasable connector – for solid, stranded and flexible wires
- Innovative levers – opens in the opposite direction of insertion points
- Compact design – suits tight spaces.
- Easy to use - no need to lift the levers when using on solid wire
- Continuity check wires - for testing
- Clear window at the bottom of the connector - allows for visual verification of connection
- Secure your cables in seconds – no screwdriver, no crimping, just strip, push, connect
- Wire clamping range - 0.2 mm² to 4.0 mm² (24 - 12 AWG for solid and rigid stranded wires (7 strands) and 0.14 mm² to 4.0 mm² (24 - 12 AWG) for flexible wires
- AS/NZS IEC 60998.1 and AS/NZS IEC 60998.2.2 and UL 486C compliant
- CE, UKCA, UL and ENEC approved

Ordering information

Wires	Quantity	Cat. No.
2	Jar of 100	30-0092J
3	Jar of 50	30-0093J
5	Jar of 40	30-0095J



Specifications

		Model L2 2 wires	Model L3 3 wires	Model L5 5 wires
Rating	IEC 60998	32 Amp / 450V / 85°C (ambient)		
	UL 486 C	600V / 105°C (working)		
Depth		18.6 mm		
Width		13.3 mm	18.9 mm	30.4 mm
Height		8.8 mm		
Wire Range	Solid and Rigid Stranded	0.2mm ² -4.0mm ² /24-12 AWG		
	Flexible Wires	0.14mm ² -4.0m ² /24-12 AWG		

AS/NZS IEC 60998.1 and AS/NZS IEC 60998.2.2 compliant.
Manufactured in Europe.



PUSH-IN WIRE CONNECTORS

The Push-In wire connector can reduce installation time by up to 50% compared to more traditional connection methods such as terminal blocks.

Push-In connectors are the perfect replacement for crimped splices.

- Fits any combination of 0.75mm² - 4.0mm² solid or 1.5mm² - 2.5mm² stranded (≤ 7 strands) copper conductors or tin bonded flexible wire
- 32 Amp rating
- High quality, secure connections
- Clear shell allows verification of connection
- Continuity test wires
- Colour coded for easy identification
- AS/NZS IEC 60998.1 and AS/NZS IEC 60998.2.2 and UL 486C/UL 467 grounding compliant*
- CE, UKCA and UL approved



Ordering Information

Model	Colour	Wires	Quantity	Cat. No.
32	Red	2	Jar of 100	30-1132J
33	Orange	3	Jar of 100	30-1133J
34	Yellow	4	Jar of 50	30-1134J



Specifications

		Model 32 Red 2 wires	Model 33 Orange 3 wires	Model 34 Yellow 4 wires
Rating	IEC 60998	32A/450V/105°C max		
	UL486	20A/600V**/105°C		
Depth	19.81 mm			
Width	13.21 mm	17.53 mm	20.83 mm	
Height	9.65 mm			
Wire range	Solid	0.75mm ² to 4.0mm ² / 20-12 AWG		
	Stranded	1.5mm ² to 2.5mm ² * (≤7 Strands) 16 - 14 AWG (≤19 str.) 18 AWG (7 Strands)		
	Tin Bonded	18 - 14 AWG (≤19 str.)		

COPPER TO COPPER ONLY. Do not use on aluminium.* Only 2, 3 and 4 wires.
 **600V maximum building wire, 1000V maximum signs or lighting fixtures.
 AS/NZS IEC 60998.1 and AS/NZS IEC 60998.2.2 compliant.
 Manufactured in U.S.A.






SPLICELINE® IN-LINE WIRE CONNECTORS

The SpliceLine® in-line wire connector provides a crimp-free, solderless butt splice. The two-wires model accepts up to 4.0mm² (14AWG) solid wire, allowing one connector to do the job of multiple through-crimps.

Its end-to-end connection is also a great solution for pre-fab operations.

- Tool-free, push-in through crimp
- Easily passes through standard knockouts
- End-to-end connection ideal for pre-fab operations
- Transparent polycarbonate window for visual inspection of connection
- AS/NZS IEC 60998.1 and AS/NZS IEC 60998.2.2, UL 486C and UL 467 grounding compliant
- CE, UKCA and UL listed

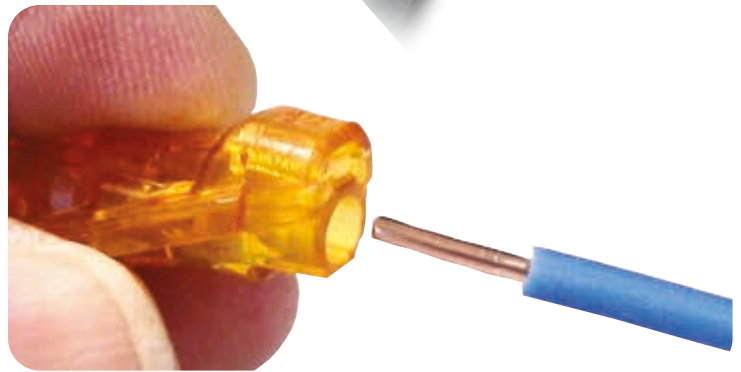

Ordering Information

Description	Qty.	Cat. No.
SpliceLine In-line Wire Connectors	Jar of 100	30-1142J



Specifications

Model 42 / Orange / 2 wires			
Rating	IEC 60998	32A/450V/105°C max	
	UL 486	20A/600V/105°C	
Wire range	Solid	0.5mm ² - 4.0mm ²	20-12 AWG
	Stranded	1.0mm ² - 2.5mm ² (≤ 7 strands)	16-12 AWG (≤19 strands)
	Tin Bonded	18 - 14 AWG (≤19 str.)	

AS/NZS IEC 60998.1 and AS/NZS IEC 60998.2.2 compliant.
Manufactured in U.S.A.



IDEAL INDUSTRIES, INC.

IDEAL INDUSTRIES (AUST) PTY. LIMITED

17/35 Dunlop Road, Mulgrave, VIC 3170, Australia | +61 3 9562 0175 | infoaus@idealindustries.com

International offices:

Australia • Canada • China • India • Germany • Mexico • Middle East • UK

For complete sales office contact information, visit us at:

idealind.com