

LEOPARD

LE4X4 LE4X4BK LE4X4AC

*See currrent catalogue for further detail

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


Do not wash the cover plates in water over 60°C.



4 x 4 – 4 Sockets x 4 USBs


LE4X4

- Approved to AS/NZS3112 & AS/NZS60950-1
- Four sockets and four USB ports
- Wide spacing between sockets for wide plug bases.
- Mounting Block [PU4X4MB] suits Leopard 4X4 Products
- The rating for the USB is 2 x 3.1A at 5V when one device is inserted then it divides to split the output when a device is inserted in each USB socket 3.1A available across 2 USB outlets on the left and 3.1A available across 2 USB outlets on the right
- · Fits standard wall boxes and mounting accessories
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White. Also available in Black please check availability

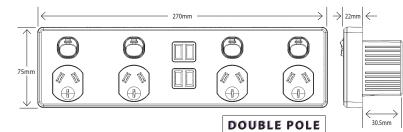

LE4X4AC

- Approved to AS/NZS3112 & AS/NZS60950-1
- Suitable for USB Type C applications up to 3 Amp at 5V.
- Ideal for phones that utilise USB Type C connections.
- Not suitable for lap tops or other devices requiring greater output than 3 Amp at 5V.
- Four sockets and four USB ports
- Wide spacing between sockets for wide plug bases.
- Mounting Block [PU4X4MB] suits Leopard 4X4 Products
- The overall electronic assembly rating is 3.1A at 5V; it then divides the output when devices are inserted in each USB socket.
- Fits standard wall boxes and mounting accessories
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White.

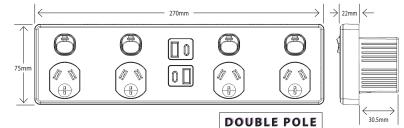

Catalogue Number	Description
LE4X4	Power Point Switched 4 Gang, 10A 250V~ and 4 USBs 5V 2 x 3.1A
LE4X4BK	Power Point Switched 4 Gang, 10A 250V~ and 4 USBs 5V 2 x 3.1A Black
LE4X4AC	Power Point 4 Gang 10A 250V~ Double Pole Plus 4 Gang USB Charger Type A & C (3.1A Top & 3.1A Bottom)

Certification Number: GMA-502543-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067 P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au www.gsme.com.au



Data Specification Sheet December 2022