



FLEXI STREAMLINE 24V TC SELECTABLE KITS - 2/5/10M

TC selectable strip kits available in 2, 5 or 10m length , CRI90

Application

Perfect for the home or commercial, feature lighting application

Design Specifications

- Choice of 2 metre (15W), 5 metre (35W) or 10 metre (60W) kits, ***refer wiring diagrams or installation instructions for cutting and wiring configurations for existing installations and single colour requirements***
- TC selectable 2700, 4000, 6000K
- Streamline COB LED technology, providing a smooth lighting profile
- Beam distribution 140° , CRI90, 560 LED's per metre
- Remote (IP20) non-dimmable driver included with flex and plug for easy installation
- Cutable (every 50mm), note when cutting LED strips, it is always important to calculate the remaining LED load to reconfirm its compatibility with the existing driver, as driver changes may be required with moderate reduction in loads. [LED channel options refer this section](#)



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Beam Angle (°)	CRI	Lumens (lm)
	FLBP24V2M/TC	240	15	140	90	500/560/610
	FLBP24V5M/TC	240	35	140	90	500/560/610
	FLBP24V10M/TC	240	60	140	90	500/560/610
	FLC08TC/KIT	24			90	
	PLUTO15TC24V	240	15		90	
	PLUTO40TC24V	240	40		90	
	PLUTO60TC24V	240	60		90	



LEDs Per Metre	Cutting Interval	CCT (K)	Body Colour	Dim (mm)
560	50	2700/4000/6000	SILICON	2000(L) x 8(W) x 1.7(H)
560	50	2700/4000/6000	SILICON	5000(L) x 8(W) x 1.7(H)
560	50	2700/4000/6000	SILICON	10000(L) x 8(W) x 1.7(H)
			BLUE	
			BLUE	
			BLUE	

NOTE: Pluto 15/40/60TC drivers are only compatible with SAL FLEXI Streamline FLBP24V/TC strip

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

TC SELECTABLE CUT AND JOIN GUIDE

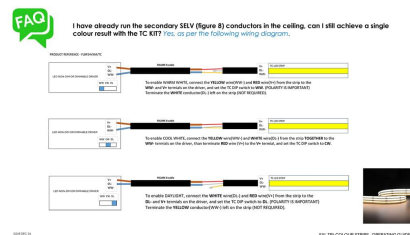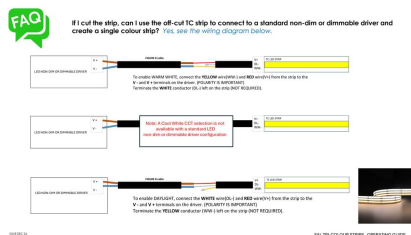

FAQ

Can I cut the strip? Yes, the strip is cuttable at intervals of 50mm. It is always important to calculate the remaining LED load to ensure its compatibility with the existing driver, as driver changes may be required with moderate reduction in loads.

If I cut the strip and I need additional drivers, does SAL have spare drivers? Yes, there are three 24V models available: FLBP24V2M/TC, FLBP24V5M/TC, FLBP24V10M/TC.

What is the IP rating of the strip? The strip is rated at IP44 and the driver supplied in the kit is rated at IP20.

Are the TC KIT strips dimmable? Unfortunately, no. For dimming options, please refer to.

How many kit options are available? 2 metre, 5 metre and 10 metre kits.

Are heat sinks required for installation of a strip? For optimum system performance, a LED heat sink channel is recommended.

Is a COOL WHITE CCT selection available with a standard LED non-dim or dimmable driver configuration wired to a TC strip? This CCT configuration is not available.

SAL TRI-COLOUR STRIPS, OPERATING GUIDE

