



PLUTO 200

Australian approved constant voltage LED drivers IP66

Application

An ideal choice for LED strips, LED Neon or inground lighting requirements

Design Specifications

- SELV and EMC compliant
- Safe no load operation, power factor 0.95
- Overload and short circuit protection
- 1.2 m flex and plug fitted for easy installation, output (secondary) end is provided with rubber fly leads
- Durable metal casing IP66
- Minimum load 10 watt




Technical Specification


Model No.	Input Voltage (V/AC)	Output Voltage (V/DC)	Frequency (Hz)	Power (W)	Power Factor	Dim (mm)
PLUTO 200/12V	240	12	50	200	0.95	252(L) x 68(W) x 39(H)
PLUTO 200/24V	240	24	50	200	0.95	252(L) x 68(W) x 39(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

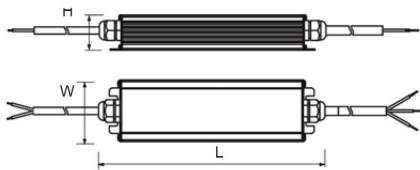

Wiring Diagram

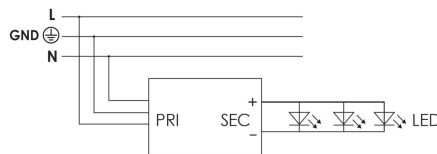

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**DIMMABLE
CONTROL WITH
SFI FLICKER
CONTROL
TECHNOLOGY**
when paired with
SAL SFI downlights



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

