



## PLUTO40DV - 12/24V 40W


Australian approved dual voltage selection, constant voltage LED power supply

### Application

Versatile and compact dual voltage range with captive terminal screws, ideal for low wattage retrofit and maintenance lighting requirements

### Design Specifications

- SELV and EMC compliant
- Safe no load operation, non-dimmable
- Overload and short circuit protection
- Hard wired termination design
- 40 watt capacity with selectable 12V DC or 24V DC secondary outputs
- Electrical class II, Do Not Cover

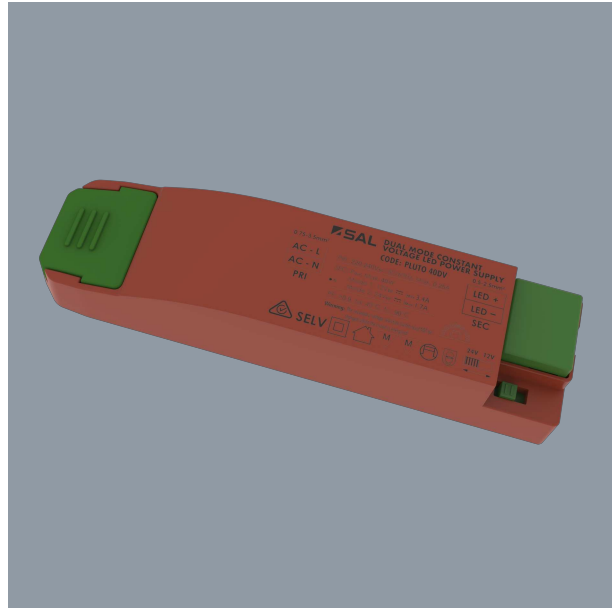

### Performance

- Dimmable - NO



### Technical Specification

| Product         | Model No.  | Input Voltage (V/AC)   | Frequency (Hz) | Output Voltage (V/DC) | Power (W) | Power Factor |
|-----------------|------------|------------------------|----------------|-----------------------|-----------|--------------|
|                 | PLUTO 40DV | 240                    | 50             | 12-24                 | 40        | 0.9          |
| <b>Dimmable</b> |            | <b>Dim (mm)</b>        |                |                       |           |              |
| NO              |            | 160(L) x 40(W) x 30(H) |                |                       |           |              |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

# THE SFI SYSTEM ELIMINATES LED FLICKERING.

**DIMMABLE  
CONTROL WITH  
SFI FLICKER  
CONTROL  
TECHNOLOGY**  
when paired with  
**SAL SFI downlights**



**DIM with  
FLICKER  
CONTROL**

For related  
products  
please  
scan me

