

x 2.1a USB-A & USB-C


USB 2.1a

Electrical Data


Supply Voltage: 110-240ac 50Hz 110-240ac 50Hz 110-240ac 50Hz 110-240ac 50Hz

Max Current: 10a or 2400W 10a or 2400W 10a or 2400W 10a or 2400W



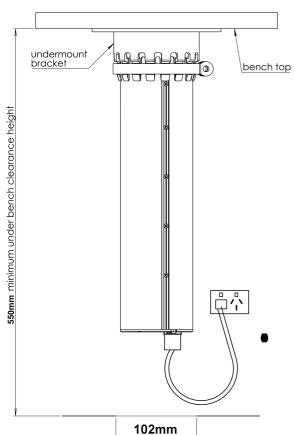

Compact Silver Compact Black Compact Silver/USB Compact Black/USB

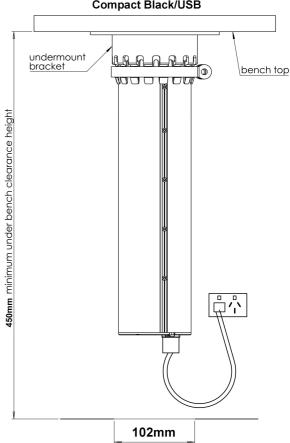

Total load connected not to exceed rating

All Point Pods have an overload switch

For indoor use only

Aproval no. GMA-504353-EA

IP rating - IP44

Designed and engineered in Australia

Made in China

