

ACCESSORY MOUNTING BASE

Colour





DATA SHEET





Power Supply AC Mains Rated Supply Voltage 220...240Vac MODEL: Number of Device Hard Wired Interconnected up to 40 Pieces RRB **Operating Distance** 150M in Free Field Compatible Red Smoke Alarms Model R240 **Key Information** Red Smoke Alarms Model R240RC Product or component Relay Base **Relay Rating** 250V AC, 2A Device application Mounting with Cable **Relay Contacts** NO / COM / NC Contacts (Voltage-Free) or Conduit Remote Input Dry Contact Momentary Switch White Quantity Set of 1 (for Remote Test / Silence function) Packaging Type Carton Connections 2x1.5 MM² Wiring Capacity For Active: - Terminals For Neutral: 2x1.5 MM² Wiring Capacity For Earth Loop: 2x1.5 MM² Wiring Capacity For Interconnect: 2x1.5 MM² Wiring Capacity Hinge Type of Installation Indoor Diameter 140 MM Relay Contacts (No / Com /Nc) 55 MM Height Ambient Air Temperature 0...45°C Electrical Contacts (A. N. I) for Operation . ຄຸດ z **Relative Humidity** 5...95%



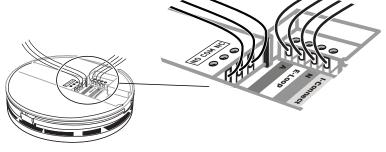

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability of reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Red Smoke Alarms PTY. LTD nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.



Find out more on our website www.redsmokealarms.com.au