



## LED RGB STRIP CONTROLLER LT8915RGB/BT


Smart RGB colour LED strip controller

### Application

Home theatre, commercial spaces and decorative feature lighting designs which require smart control

### Design Specifications

- Designed for RGB colour brightness control, smooth 0 - 100% dimming
- Input voltage range: 12-24V DC
- Each controller provides three output channels with a maximum current of 6A for each channel, 432W maximum power output at 24V
- Supports momentary switch (bell press control)
- Four flashing modes and optional memory function
- Supports both wireless and wired group control  
Dimming is achieved via the PIXIE or PIXIE PLUS app (strip controller if supplied) or via a SAL Multifunction control. Trailing edge dimmers are not suitable

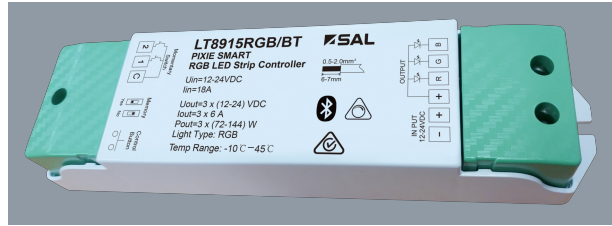

### Performance

Dimmable - **YES**


Dimmer Type - **PIXIE Bluetooth control**

### Technical Specification

Model No.	Power (W)	Input Voltage (V/DC)	Dim (mm)	Dimmable
LT8915RGB/BT	432	24	175(L) x 45(W) x 27(H)	YES

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

### Dimensions

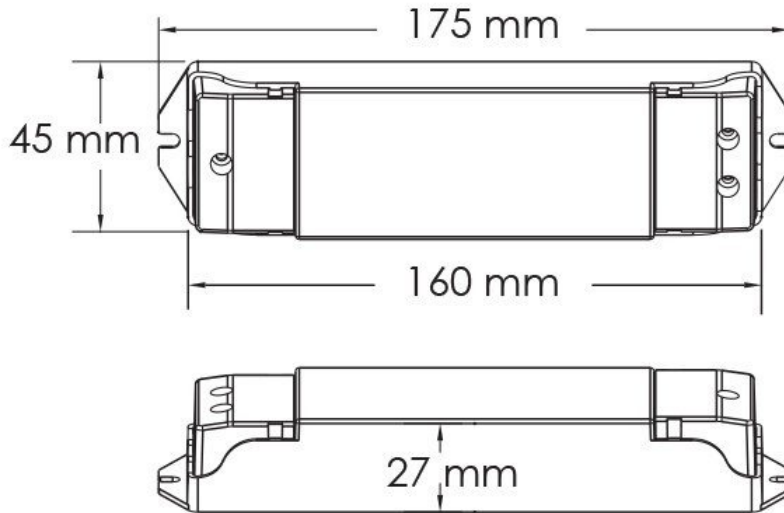

### Wiring Diagram

