PIXIE

Simple. Smart. Home.
Make Your Home Smart Simply With PIXIE

PIXIE Translator

#PC100T-R-BTAS

Bluetooth®

▶ Basic operation

- 1 click Depends upon the program result
- 4 clicks manual pairing
- 9 clicks reset device

Using 'control-buttons' on device and momentary inputs

▶ Applications

Low level dry contact / volt free interfacing from other PIXIE devices and 3rd party systems for on-site integration scenarios

▶ Whats in the box

1 x Translator, installation instructions

▶ Accessories

Bell Press mechs from 3rd party for optional connection to bell-press inputs.

SCAN ME

Download the PIXIE and PIXIE PLUS Apps

Download on the App Store

GET IT ON Google Play

#PC100T-R-BTAS
PIXIE Blind & Signal Controller

Single signal <u>input</u> for connecting a momentary switch, a toggle switch, voltage-free contacts of devices that can generate dry contact signals. It enables integration between PIXIE and other systems. Comes with 24hour/7 Day scheduling, Groups, Scenes and mobile app control and configuration.

Features

- Module to provide 3rd party, on-site interface with PIXIE smart home
- Dry contact / low level / volt free integration of PIXIE system from any system capable of providing necessary dry contact
- Ideal for receiving low-level inputs from sensors, alarm systems, audio visual systems, intercom systems
- Can accept both a PULSE signal and / or a Latch/Unlatch signal for logic processing
- LED indicator colour is white when the product is new or has been reset, LED indicator colour is amber when operating in "Latch" mode, the LED indicator colour is green when operating in "Pulse" mode.

Electrical

Input(V)(Hz)	240/50
Standby Power	0.5 Watts
Operating ambient min/max (°C)	0 to 60°
Typical wireless range	15 metres typical indoors ❄
IP Rating	IP20

❄ Depending on building materials and construction.

PIXIE

Simple. Smart. Home.
Make Your Home Smart Simply With PIXIE

PIXIE Translator
#PC100T-R-BTAS

Related products

PIXIE Multifunction
#SMFBTAS

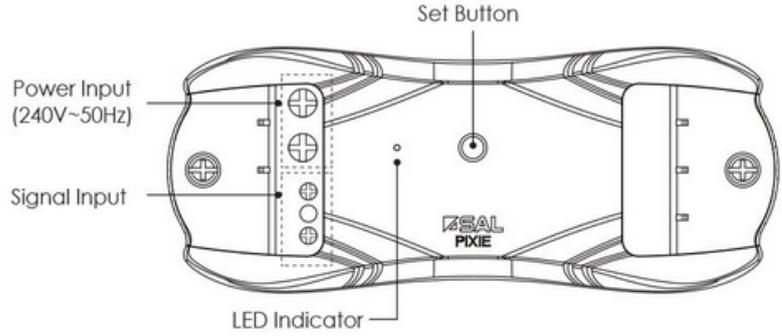PIXIE Blind & Signal
#PC206BS-R-BTAM

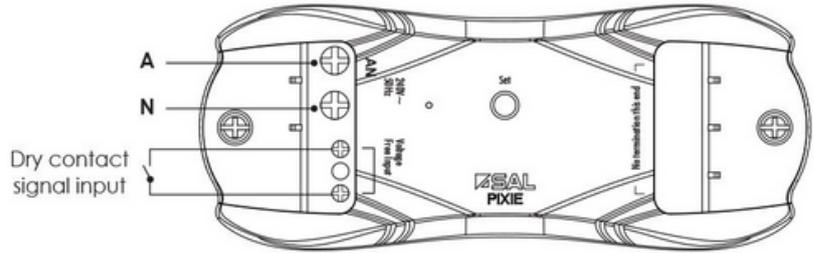PIXIE Dual Relay
#PC206DR-R-BTAM

PIXIE Gateway
#SGWBT

Wiring Diagram

Buttons and terminals

Set Button

Power Input
(240V~50Hz)

Signal Input

LED Indicator

SAL PIXIE

Wiring diagram

A

N

Dry contact
signal input

Set

SAL PIXIE

PIXIE fits in

PIXIE fits in to a huge range of Australian wall plates

SCAN ME

SCAN ME

Download the PIXIE and
PIXIE PLUS Apps

Download on the
App Store

GET IT ON
Google Play

PDF Prepared 23.7.2021 9:26am

PIXIE

PIXIE PLUS