



## ECOGEN S9041TC ROUND - 10W

Dimmable IP44 LED downlight with selectable colour temperature

### Application

Ideal for any residential or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4200K/5700K
- Durable die-cast aluminium body profile
- Stylish white powder coat finish or satin nickel
- Colour trim options: (black ring S9041 BK RING), (satin nickel S9041 SN RING), (silver ring S9041 SL RING)
- Remote constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency SMD LED chips and quality opal polycarbonate diffuser



### Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge, optional 1-10V, DALI / DSI**

## Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
S9041 TC WH	LED D/L 10W IP44 3/4/6K DIM WH	240	10	850/1000/900	3000/4200/5700	90
S9041 TC SN	LED D/L 10W IP44 3/4/6K DIM SN	240	10	850/1000/900	3000/4200/5700	90
S9041 HO TC WH	LED D/L 13W IP44 3/4/6K DIM WH	240	13	1040/1170/1105	3000/4200/5700	90

## Technical Specification


Model No.	Dimmable	CRI	Body Colour	Dim (mm)
S9041 TC WH	YES	80	WHITE	103(W) x 40(H)
S9041 TC SN	YES	80	SATIN NICKEL	103(W) x 40(H)
S9041 HO TC WH	YES	80	WHITE	103(W) x 40(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions



### Dimensions

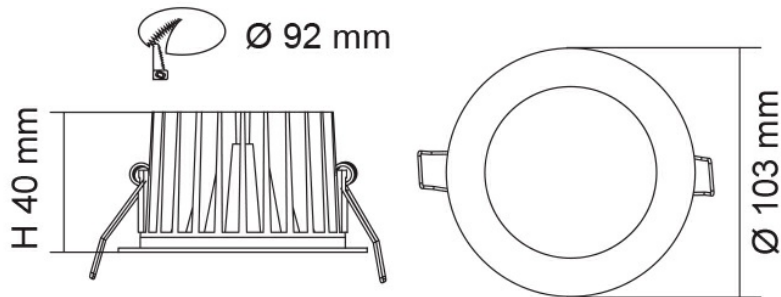



## Photometric Data

Unit: cd C0/C180 — C30/C210 —  
cd C60/C240 — C90/C270 —

### S9041 TC at 3000K

