


Thermoscreed In Screed Heating Cable Kits

For Installation In Screeds Up To 50mm Thick



- 1 Tiled floor finish
- 2 Flexible tile adhesive
- 3 Sand & cement screed
- 4 Thermoscreed 18W/Lm Loose Wire
- 5 Econobard uncoated insulation board
- 6 Flexible tile adhesive
- 7 Concrete substrate

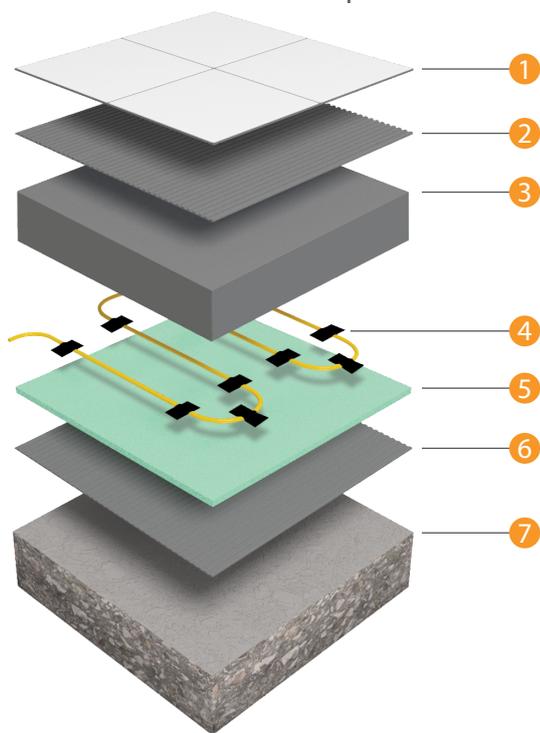

Lifetime Warranty

We are so confident in the quality of Thermoscreed Underfloor Heating that we give each cable a warranty that lasts a Lifetime with 3 year warranty on the Thermostat.



Robust, hard wearing cable

The advanced protective PVC coating on Thermoscreed cables protects the heating element during installation and provides a long product life span.



In Screed heating

Suitable for installation in screeds of 20mm to 50mm, and is recommended to be fixed to insulation boards.



Efficient storage heating effect

In Screed systems have a slower heat up and cool down time and are suited to rooms that are in constant use.



Primary or secondary heating

Thermoscreed is suitable for both primary and supplementary heating applications provided the property is adequately insulated.



Flexible cable spacing

The heating output per m² can be adjusted by varying the cable spacing to achieve your architects designed heating output for the room. We recommend an output of 180-200m² under screed

Technical Data



Fixing tape for secure cable installation

Hard wearing in screed advanced protection

IP67 Protection rating Safe in wet locations

Kit includes: Thermoscreed cable, Fixing Tape, Programmable Thermostat (5245), Floor temperature sensor Sensor conduit, Cable monitor, Installation Guide & Warranty Form.

Thickness	5.5mm
Max. Temperature	28°C *
Protection rating	IP67
Warranty	Lifetime on cable, 3yrs on thermostat
Wattage	18W/lm
Conductor Type	Single Ended
Cold Tail Length	3m

* Regulated by floor sensing thermostat



Installation Accessories

Thermoscreed In Screed heating cables can be fixed in position with one of three fixing methods. The Fixing Tape is the standard fixing method used on any substrate. Optional methods included the Galvanised Fixing Profile for fixing onto concrete or timber substrates or In Screed Cable Mesh for use on a waterproofed substrate.




3255
Fixing Tape

A 25mm roll of Fixing Tape is included in Thermoscreed Kits as a standard fixing method for use on any substrate.



3259
Galvanised Fixing Profile

A 25m roll of galvanised steel fixing profile. Can be mechanically fixed to timber or concrete substrates. Allow 1m of fixing strip per 6m of heating cable.

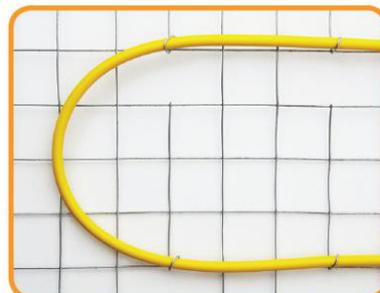

3263
In Screed Cable Mesh

A 4.5² roll of loose lay mesh which is designed for loose laying over a waterproofed substrate.

Thermoscreed In Screed Dual Kit

Stock Code	Length (m)	Area (m ²)	Output (W)	Resistance (Ω)
3050T	11.0	1.0 - 1.2	200	264.5
3051T	16.5	1.3 - 1.7	300	176.3
3052T	22.0	1.8 - 2.2	400	132.2
3053T	27.5	2.3 - 2.7	500	105.8
3054T	33.0	2.8 - 3.2	600	88.2
3055T	39.0	3.3 - 3.8	700	75.6
3056T	45.0	3.9 - 4.6	850	62.2
3057T	55.0	4.7 - 5.6	1000	52.9
3058T	69.0	5.7 - 6.8	1250	42.3
3059T	76.0	6.9 - 7.6	1375	38.5
3060T	94.0	7.7 - 9.4	1700	31.1
3061T	116.0	9.6 - 11.7	2100	25.2
3062T	144.0	11.8 - 14.4	2600	20.4
3063T	183.0	14.5 - 18.3	3300	16.0

Thermoscreed Installation Accessories

Stock Code	Output (W)	Resistance (Ω)
3263	In Screed Cable 50x50mm Mesh	4.5m ²
3259	Galvanised Fixing Profile	25m
3255	Fixing Tape	36mm x 25m