


Thermoslab In Slab Heating Cable

For installation in the slab of new builds

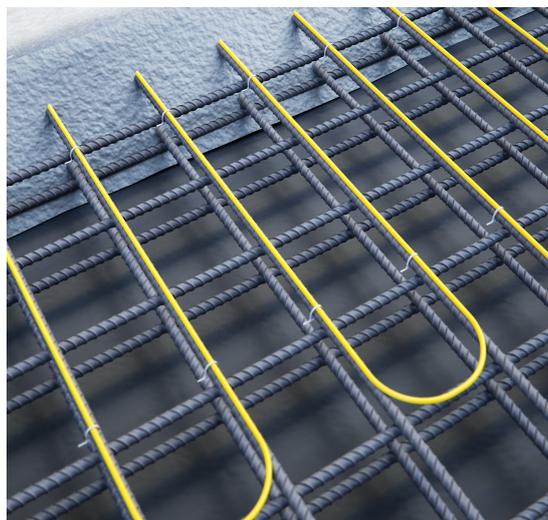

Thermoslab is a brilliantly versatile, robust 7mm thick underfloor heating cable designed for use in slab.


Install the cable in the concrete slab of new builds to create an energy efficient thermal mass under your floor.

To work out which heating cable is required, multiply the Square Metres of your area by 5 to give the required linear metres of cable.



Stock Code	Length (m)	Output (W)	Resistance (Ω)
3138	10	300	176.33
3139	20	600	88.17
3141	30	900	58.78
3142	37	1100	48.09
3145	50	1500	35.27
3147	60	1800	29.39
3148	67	2010	26.32
3152	84	2500	21.16
3155	100	3000	17.63
3156	112	3350	15.79
3158	134	4020	13.16
3160	150	4500	11.76
3161	170	5100	10.37
3163	185	5500	9.56
3164	200	6000	8.82

Technical Data

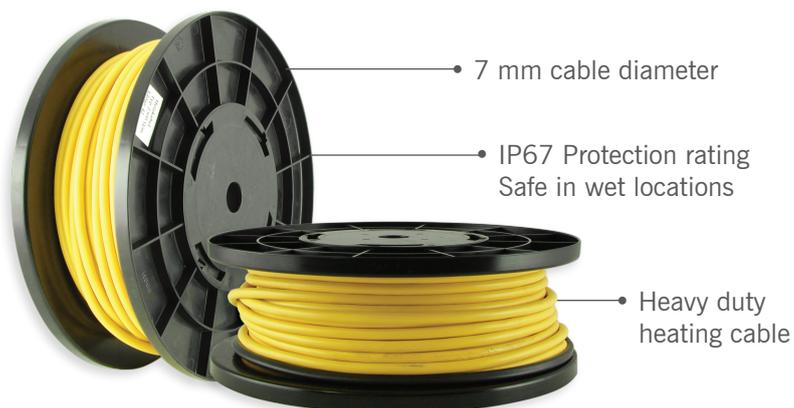

Thickness	7mm
Max. Temperature	28°C*
Protection Rating	IP67
Warranty	Lifetime Warranty
Wattage	30W/LM
Conductor Type	Single Ended
Cold Tail Length	5m

*Regulated by floor sensing thermostat