

WAGO L-BOXX® MINI



887-952: SORTIMO 221 4 mm² COMBI




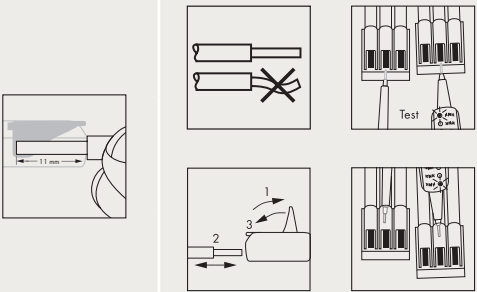



For all Wire Types


- ✓  Solid "s"
- ✓  Stranded "st"
- ✓  Fine-stranded "f-st"

Compliant for use in Australia & New Zealand under AS/NZS 3820 & AS/NZS 60998
 Suitable for all Cu terminations (including earth). Continuous service temp. 105C (T105) max.
 Ambient operating temp. 85C (T85) max. Adheres to AS/NZS 3000 under Clause 1.7.3 Note 2.




887-952: 4 mm² L-BOXX® Mini 221

	Description	Item No.	Pack. Unit	Application
	2-wire connectors	221-412	100	
	3-wire connectors	221-413	100	
	5-wire connectors	221-415	25	
	Mounting carrier; for 2-, 3- and 5-wire connectors; 4 mm ² variant	221-500	4	

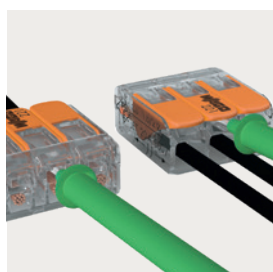


Two test slots

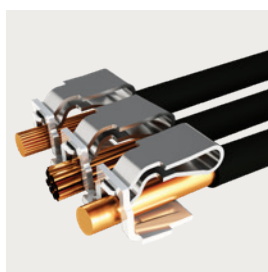

Industry's widest range of conductor sizes

- Combine any type and size of Cu conductors

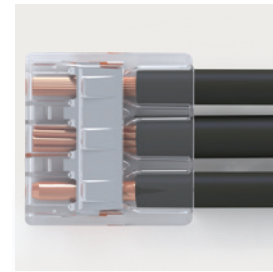

Transparent housing

- Clearly identify if the conductor has been stripped and inserted properly

(03) 8791 6300

sales.anz@wago.com | www.wago.com.au

WAGO is a registered trademark of WAGO Verwaltungsgesellschaft mbH.

 facebook.com/WAGOAusNZ

 linkedin.com/company/wagoaustralia

 WAGO Australia & New Zealand

 instagram.com/wago.aus.nz/