

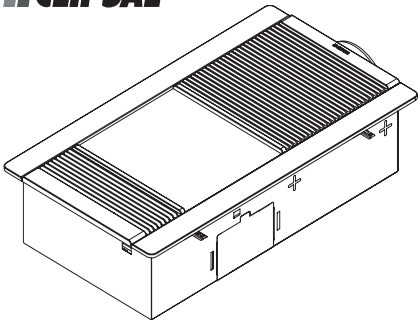
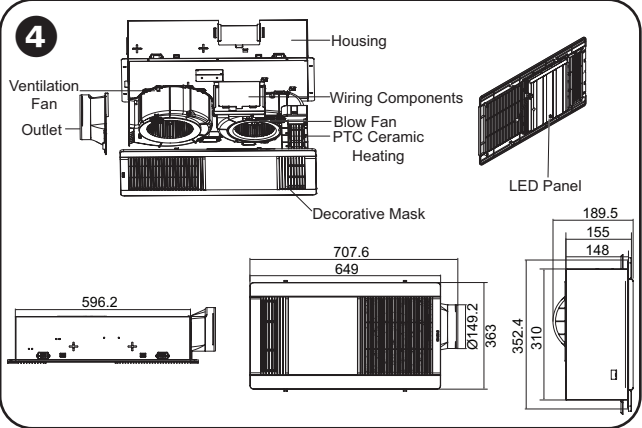
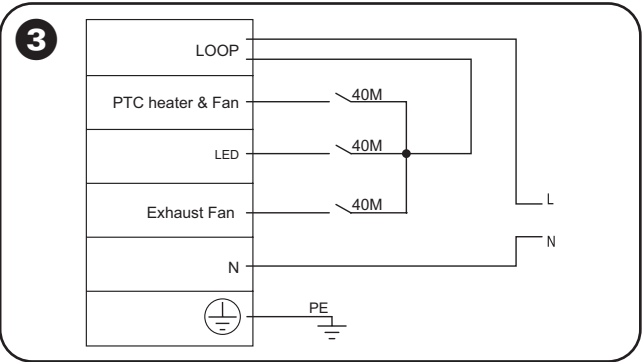


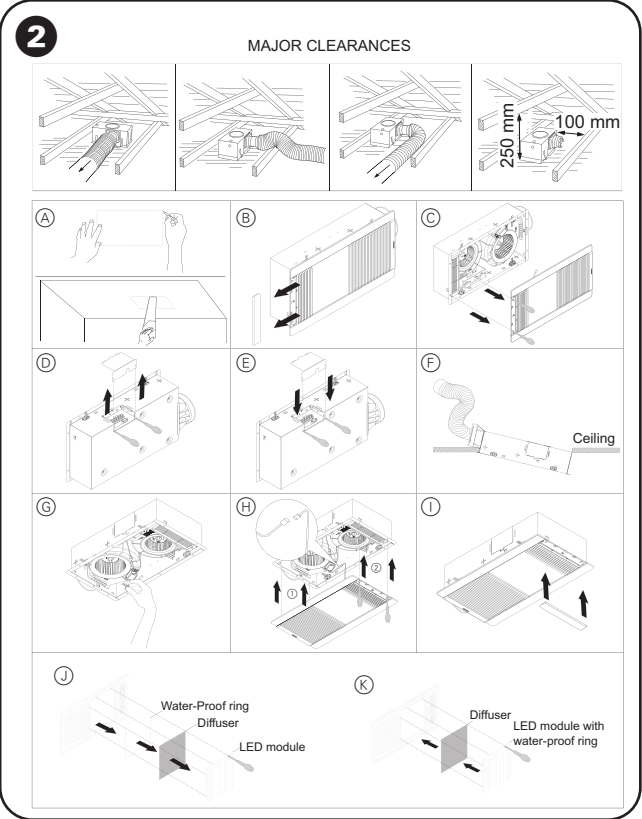

CPL7000FLH-WE

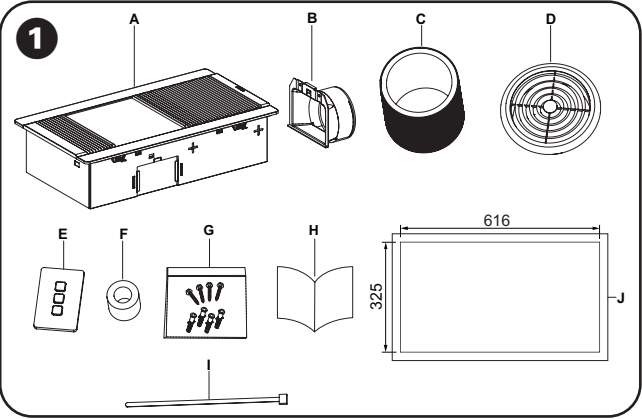

About this product

The Clipsal 3-in-1 with Ducting (hereinafter referred to as *product*) is designed for larger bathrooms. Standard features include one fan for exhausting, LED light, PTC heater and its fan. The product has a powerful centrifugal exhaust fan and is supplied with a labelled Iconic series wall switch for easy identification. All functions switch separately.

⚠ WARNING

HAZARD OF ELECTRIC SHOCK, FIRE AND SERIOUS INJURY

- The product must be installed at least 2.3 m above the floor and to be at least 0.6 m away from bath and shower.
- Supervise children to ensure they do not play with the appliance.
- Install the bathroom heater in a way that prevents switches and controls from being accessible to a person in the bath or shower.
- Do not mount any electrical accessories near the outlet of the ducting.
- Heater should not be installed directly beneath a socket-outlet.
- Do not spray water on the fascia to avoid short circuit or electric shock.
- Do not touch the fascia or the wall switch with wet hands to avoid electric shock.
- Please contact customer care or a qualified electrician if there is any issue with the unit. Do not disassemble, repair or modify the unit.
- Do not insert fingers or other objects into the fascia when the appliance is in operation, in order to avoid injury.
- Only install this product in strict accordance with the wiring diagram in these instructions.
- Use this product only in the manner intended by the manufacturer. If you have any questions, please contact the manufacturer or authorised distributors.

Failure to follow these instructions can result in fire and serious injury.

⚠ WARNING

EQUIPMENT OPERATION HAZARDS

- This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they are supervised or instructed by a person responsible for their safety.
- During installation, ensure to take care to avoid the surrounding wiring, building structures, and hidden utilities.

Failure to follow these instructions can result in serious injury and/or equipment damage.

⚠ WARNING

IMPORTANT CLEANING SAFEGUARDS

- Ensure that the product is switched off before cleaning.
- Do not clean the appliance with any chemicals that may encourage corrosion or may damage the unit.
- Always use a soft, damp, non-abrasive cloth to clean the product.
- Regularly clean away dust, dirt and debris from inside the body, motor, blades and brackets.

Failure to follow these instructions can result in death, serious injury, or equipment damage.

1 Packaging content

- | | | | |
|---|--------------------|---|-------------------------------------|
| A | Fan light heater | G | Screw pack (4 screws, 4 wall plugs) |
| B | Duct adapter | H | Installation guide |
| C | Aluminium air duct | I | Cable tie |
| D | Ventilation outlet | J | Cut-out template |
| E | Iconic switch | | |
| F | Sealing tape | | |

2 Installation

NOTICE

INSTALLATION HAZARD

- Power connection might be needed before installing the product.
- This product is designed specifically for cavity-type ceilings.
- It is NOT recommended to install this product in flat-roof, raked or cathedral ceilings.
- It is recommended that the ceiling space is adequately ventilated to allow appropriate airflow through the product. Any restrictions on return air entering the room or exhausted air escaping from the ceiling space will impair effectiveness and may contribute to premature failure.
- A minimum of 250 mm clearance is required above the ceiling where the product is to be installed.
- A minimum of 100 mm clearance is required between the installation location and any other ducting in the ceiling space.
- Follow regulations concerning the discharge of air have been fulfilled.
- Joists, beams and rafters must not be cut or notched to install the product.

Failure to follow these instructions can result in equipment damage.

NOTICE

CORRECT INSTALLATION

- Failure to position the fascia correctly may cause housing to warp.
- The product's centre cavity is designed to accept only CPL7000LED panel light.
- Only install CPL7000LED. Do not install any other type of panel as this may cause overheating and subsequent warping of the body.

Failure to follow these instructions can result in equipment damage.

Ceiling Mounting

- (1) Remove the marking area from the template. Place it on the ceiling where you want to mount the product and draw around the edges with a pencil to mark the cut-out area (Refer A).
- (2) Use a saw to cut the section along the drawn lines.
- (3) Remove the decorated cover from the fascia (Refer B).

- (4)

Remove the screws and decorated cover from the housing (Refer ).
NOTE: Ensure to detach the connector and power cord of the LED panel.
- (5)

Remove the screws and terminal cover to access the terminal block (Refer ). Use cable 1.5 mm² or 2.5 mm² cable to do the wiring (Refer ). Screw the housing with terminal cover once wiring is done (Refer ).
- (6)

Position the housing at the cut-out and attach the duct to the side of the housing (Refer ).
- (7)

Insert the product through the hole and ensure the 4 mounting clips support the product on the ceiling. Position the 4 mounting clips appropriately (Refer ).
NOTE: There will be additional crossed holes for fixing the housing to the rafter (optional).
- (8)

Fix the decorated cover with the clips on the left side . Use screws to fix the decorated cover on the right side into the housing . Reconnect the connector and power cord of the LED panel (Refer ).
- (9)

Insert the decorated cover into the housing (Refer ).

LED Replacement

NOTE: The device is on the ceiling during the LED replacement. The light source contained in this luminaire shall only be replaced by the manufacturer or a service agent or a similar qualified person.

(1)

Remove the decorated cover from the fascia (Refer ).

(2)

Remove the screws and fascia from the housing (Refer ).
NOTE: Ensure to detach the connector and power cord of the LED panel.

(3)

Remove all the screws, diffuser and water proof ring from the LED module (Refer )

(4)

Replace diffuser and water-proof ring inserted into the LED module then screw back the LED module into the fascia (Refer )
NOTE: Replace the LED Driver if needed.

(5)

Fix the decorated cover with the clips on the left side . Use screws to fix the decorated cover on the right side into the housing . Reconnect the connector and power cord of the LED panel (Refer ).

(6)

Insert the decorated cover into the fascia (Refer ).

3 Wiring

 DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

This product must only be installed and serviced by an appropriately qualified and/or licensed electrical person:

• Isolate the electrical supply before doing any work on the product.

• Ensure that the product has been correctly installed to the appropriate safety standards, local wiring rules and regulations and then tested for safe operation before reconnecting the electrical supply.

• This unit must be properly grounded.

• Make sure that all electrical connections are firmly screwed and secured into the terminal block.

• This unit should not be installed near the curtains or other flammable materials, to avoid any risk of fire.

Failure to follow these instructions will result in death or serious injury.

The product comes with the required wall plate and switches.

(1)

Select the desired location to mount the switch plate. Make sure to click the switches into the backing plate in the desired order.

(2)

Connect wiring to switch plate as shown in the diagram .

(3)

On the fan light heater, remove the screws from the terminal cover on the product and put them aside. Wire according to the lable beside the terminal strip. Remove a knockout in the terminal cover to prevent fouling of the incoming cable when the cover is fitted. Replace the cover and cover screws.

4 Product Dimension Drawings

5 Installation Clearances

The minimum clearance distance from the top of the luminaire to any normally flammable building element/any building insulation is 250 mm. The minimum clearance distance from the side of the luminaire to any normally flammable building element/any building insulation is 100 mm.

 WARNING

RISK OF FIRE AND SERIOUS INJURY

• Risk of overheating or fire if the clearance distances are compromised.

Failure to follow these instructions can result in death, serious injury, or equipment damage.

Technical data

Voltage:	230-240 V~, 50 Hz
Total power consumption:	1085 W
Fan(only for exhausting):	70 W
LED light:	15 W
PTC heater(including fan):	1000 W
Fan Max. Air Movement	>400 m³/hr
Decibel Rating @3m:	<47 dBA
Storage/Transportation temperature:	-10 to +60°C
Operation humidity:	10% to 95%, RH, no condensing
Overheated protection:	Yes
Warranty:	5 years
Weight:	8.6 kg
LED performance	
CCT:	5700 K
Beam angle:	120°
Lumens:	1500 lm
Lumen depreciation	L70 B50 @50,000 hours @ 25°C
CRI:	≥80 (Only for LED)
Chromaticity:	≤ SDCM 6

Compliance

Warranty information (Australia)

We warrant this product for 5 years—
We warrant the LED for 1 year—
visit <https://www.schneider-electric.com.au/en/aboutus/legal/terms-and-conditions.jsp>
Our goods also come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Warranty information (New Zealand)

We warrant this product for 5 years—
visit <https://www.schneider-electric.co.nz/en/aboutus/legal/terms-and-conditions.jsp>
Schneider Electric (Australia) Pty Ltd
33-37 Port Wakefield Road,
Gepps Cross, SA 5094
Customer Care: 13 73 28
Email: customercare.au@se.com
www.clipsal.com
Schneider Electric (NZ) Ltd
Building 6, 60 Highbrook Drive, East Tamaki, 2013, New Zealand
Customer Care: 0800 741 303
Email: customercare.nz@se.com
www.pdl.co.nz

Schneider Electric reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this instruction is correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.
© Schneider Electric 2024. This material is copyright under Australian, New Zealand and international laws. Except as permitted under the relevant law, no part of this work may be reproduced by any process without prior written permission of and acknowledgement to Schneider Electric.

BRU1277600-01 08/24